Model T-20 / T-20A

Anti-Sweat Toilet Tank Valves

LEGEND VALVE

NO.	PART	MATERIAL
1	BODY	BRONZE
2	COLD PLUG	BRASS
3	HOT PLUG	BRASS
4	SPRING	304 STAINLESS STEEL
5	REGULATING CARTRIDGE	BRASS
6	ADJUSTMENT SCREW	BRASS
7	PLUG O-RINGS (2)	NBR (BUNA-N) RUBBER
8	CARTRIDGE O-RINGS (2)	NBR (BUNA-N) RUBBER
9	ADJUSTMENT SCREW O-RING	NBR (BUNA-N) RUBBER

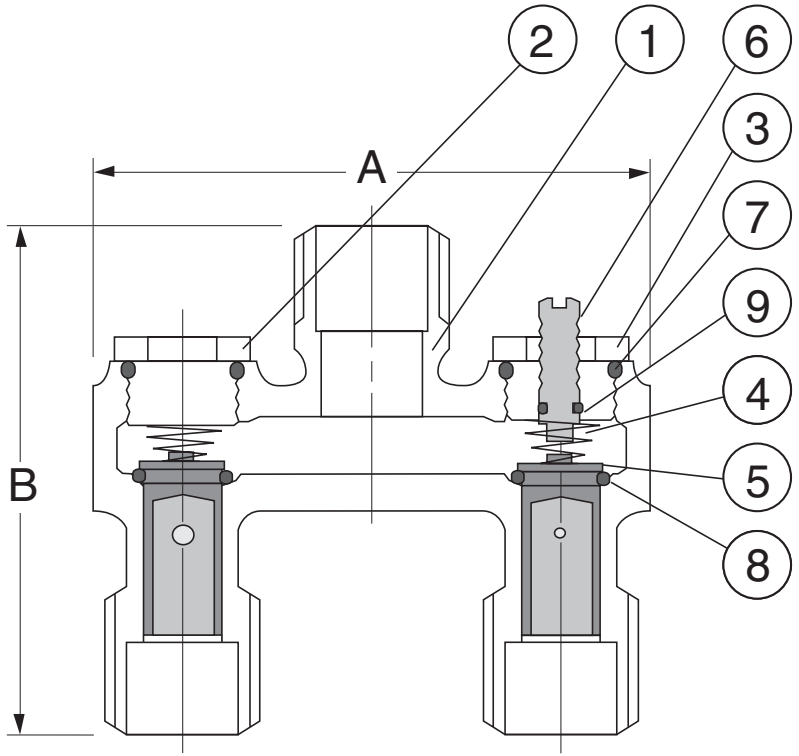

SIZE	T-20	T-20A							
A	2.99	2.99							
B	2.72	2.72							

- NOTES:
- 125 P.S.I. C.W.P.
- 180° F MAXIMUM SERVICE TEMP
- MODEL T-20 IS FACTORY SET AT 30% HOT,70% COLD MIX
- MODEL T-20A ADJUSTABLE DOWN FROM 30% HOT TO O% (100% COLD)
- ALL CONNECTIONS ARE CONBINATION 1/2" MIP OR 1/2" SOLDER
- COMPRESSION NUTS AND FERRULES ARE AVAILABLE