

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

STAINLESS STEEL PEX CLAMP RINGS

CLAMP RINGS

360° uniform compression surface pressure.

Closed Interlock: high radial loads, smooth outer contour.

For use with a ratcheting cinch tool with visual indicator.

For use on ASTM F876 / F877 PEX and ASTM F2623 / F2769 PE-RT

Not for use with PEX-AL-PEX.



Pictured:
SS PEX Clamp Ring



Pictured:
SS PEX Non-Slip Clamp Ring

MATERIAL SPECIFICATION


PART	MATERIAL
1 PEX cinch ring	304 stainless steel

DIMENSIONS

	A	A	B	C	D
Size	Standard	Non-Slip	Non-Slip	All	All
3/8"	0.52	0.5	0.54	0.43	0.28
1/2"	0.69	0.62	0.68	0.56	0.28
3/4"	0.92	0.86	0.93	0.79	0.35
1"	1.16	1.13	1.22	1.04	0.39



Pictured:

Standard Clamp

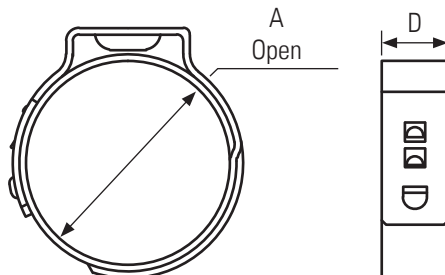

Pictured:

Non-Slip Clamp

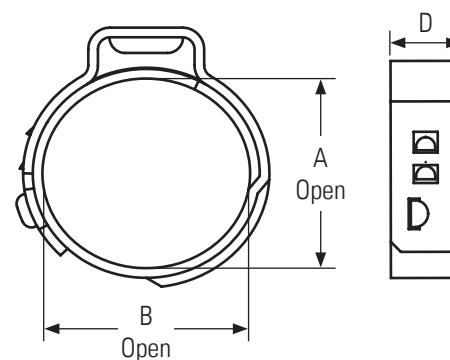

Certifications/Listing:

Third-party certified

ANSI/NSF 14: Plastic piping system components and related materials.

ASTM F2098: Stainless steel clamps for securing to metal insert and plastic insert fittings.