

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

QUARTER-TURN ANTI-SIPHON FREEZE-RESISTANT SILLCOCK

T-550, P-550, T-550P, T-550CPVC

Easy to grip 1/4-turn Softouch™ TPR coated metal handle.
Patented¹ dual disc cartridge for durable and reliable shut-off.
Oversized, 5° angled mounting flange for ease of installation. Includes EPDM rubber gasket.
Integrated anti-siphon vacuum breaker with chrome-plated brass cap
ASSE 1019-Type A Device.²

MATERIAL SPECIFICATION	
PART	MATERIAL
1 Exterior body	Brass, chrome plated
2 Outer Tube	Lead-free brass, chrome plated
3 End Adapter	Forged brass, chrome plated
4 Bonnet nut assembly	Forged brass, chrome plated / Other
5 Handwheel	Aluminum & TPR rubber
6 Vacuum breaker assembly	Forged brass / POM
7 Stem assembly	Brass / Other

DIMENSIONS - Inch	
Size	A
8"	8
10"	10
12"	12
14"	14



LegendPress®



MNPT/FNPT



MNPT/Sweat




PEX (F1807)



CPVC

DIMENSIONS - Inch	
Inlet Type	B
1/2" MNPT / 1/2" Sweat	1.6
1/2" PEX (F1807)	1.6
1/2" Press	1.2
1/2" CPVC	1.0
3/4" MNPT / 1/2" FNPT	1.6

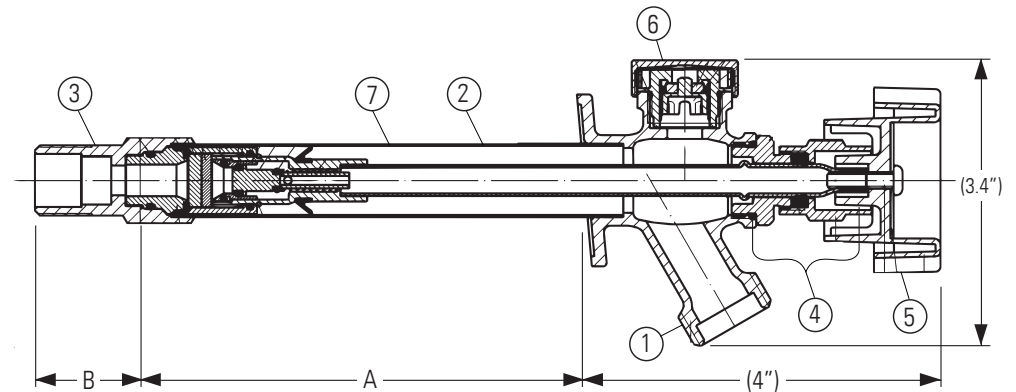

Certifications/Listings

Third-party certified
ASSE 1019-A: Performance requirements for wall hydrant with backflow protection and freeze resistance

Standards:

ANSI/ASME B1.20.1: Pipe threads, general purpose, Inch
ANSI/ASME B16.18: Cast pressure alloy solder-joint pressure fitting
ASTM F1807: Metal insert fittings utilizing a copper crimp ring or stainless steel clamps.
ASTM D2846: Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Hot- and Cold-Water Distribution Systems
ANSI/ASME B16.51: Copper and copper alloy press-connect pressure fittings
ANSI / ASME B1.20.7 (male garden hose outlet)

Pictured:
T-550
Cut-away

¹Patents: US 5,392,805; CAN 2,211,042; D 527,797

²This device must not be subjected to more than 12 hours of continuous water pressure. The hose must be removed in order to prevent damage from freezing.