

## SUBMITTAL SHEET

|                   |             |
|-------------------|-------------|
| JOB NAME          | ITEM TAG    |
| JOB LOCATION      | PART NUMBER |
| CONTRACTOR        | DATE        |
| ENGINEER APPROVAL | DATE        |

## NO LEAD QUARTER-TURN ANTI-SIPHON FREEZE-RESISTANT SILLCOCK

### T-550NL, P-550NL, T-550PNL, T-550NL-BN and T-550PNL-BN

Easy to grip 1/4-turn Softouch™ TPR coated metal handle.

Patented<sup>1</sup> dual disc cartridge for durable and reliable shut-off.

Oversized, 5° angled mounting flange for ease of installation. Includes EPDM rubber gasket.

Integrated anti-siphon vacuum breaker with matching chrome-plated brass or black-coated cap.

Available in a stylish black power coating for a contemporary exterior look.

ASSE 1019-Type A Device.<sup>2</sup>



Extra Wide Flange

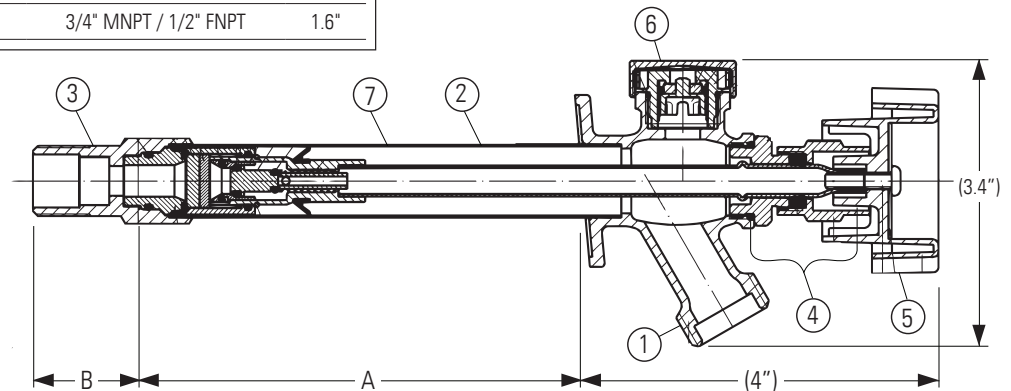

| MATERIAL SPECIFICATION    |                         |  |
|---------------------------|-------------------------|--|
| PART                      | MATERIAL                |  |
| 1 Exterior body           | Lead-free brass         |  |
| 2 Outer Tube              | Lead-free brass         |  |
| 3 End Adapter             | Lead-free forged brass  |  |
| 4 Bonnet nut assembly     | Forged brass /Other     |  |
| 5 Handwheel               | Aluminum & TPR rubber   |  |
| 6 Vacuum breaker assembly | Forged brass/ POM       |  |
| 7 Stem assembly           | Lead-free brass / Other |  |

| DIMENSIONS - Inch |     |  |
|-------------------|-----|--|
| Size              | A   |  |
| 8"                | 8"  |  |
| 10"               | 10" |  |
| 12"               | 12" |  |
| 14"               | 14" |  |

| DIMENSIONS - Inch                 |                        |      |
|-----------------------------------|------------------------|------|
| Available Sillcock Finish         | Inlet Type             | B    |
| Chrome plated/ Black power-coated | 1/2" MNPT / 1/2" Sweat | 1.6" |
| Chrome plated/ Black power-coated | 1/2" PEX (F1807)       | 1.6" |
| Chrome Plated ONLY                | 1/2" Press             | 1.2" |
| Chrome Plated ONLY                | 3/4" MNPT / 1/2" FNPT  | 1.6" |



#### Certifications/Listings:

Third-party certified

NSF/ANSI 61: Drinking water system components - Health effects.

ASSE 1019-A: Performance requirements for wall hydrant with backflow protection and freeze resistance

#### Standards:

ANSI/ASME B1.20.1: Pipe threads, general purpose, Inch

ANSI/ASME B16.18: Cast pressure alloy solder-joint pressure fitting

ASTM F1807: Metal insert fittings utilizing a copper crimp ring or stainless steel clamps.

ANSI/ASME B16.51: Copper and copper alloy press-connect pressure fittings

ANSI / ASME B1.20.7 (male garden hose outlet)

**Pictured:**  
T-550NL  
Cut-away

<sup>1</sup>Patents: US 5,392,805; CAN 2,211,042; D 527,797

<sup>2</sup>This device must not be subjected to more than 12 hours of continuous water pressure. The hose must be removed in order to prevent damage from freezing.