

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

NO LEAD MULTI-TURN FROSTFREE SILLCOCK

T-552NL, T-552PNL, P-552NL, T-552NL-BN and T-552PNL-BN

Durable chrome-plated body offers superior corrosion resistance over unplated versions.

Extended-hub handwheel moves the operator's hands away from the sharp hose bibb threads.

Equipped with an anti-siphon vacuum breaker and internal check valve, to prevent backflow into the potable water system.¹


Available in a stylish black power coating for a contemporary exterior look.

Available in various connection types, in 4", 6", 8", 10", 12" and 14" nominal lengths.


MATERIAL SPECIFICATION		
PART		MATERIAL
1	Exterior body	Lead-free brass
2	Outer tube	Lead-free brass
3	End adapter	Forged brass
4	Bonnet nut assembly	Forged Brass / Other
5	Handwheel	Cast zinc-aluminum, coated
6	Vacuum breaker assembly	Forged Brass / POM
7	Stem assembly	Lead-free brass / Other

DIMENSIONS - Inch		
Size		A
4"		4"
6"		6"
8"		8"
10"		10"
12"		12"
14"		14"

DIMENSIONS - Inch			
Available Sillcock Finish	Inlet Type		B
Chrome plated/ Black power-coated	1/2" MNPT / 1/2" Sweat		1.06
Chrome plated/ Black power-coated	1/2" PEX (F1807)		1.12
Chrome plated/ Black power-coated	1/2" PEX (F1960)		1.25
Chrome Plated ONLY	1/2" Press		1.81
Chrome Plated ONLY	3/4" MNPT / 1/2" FNPT		1.12




LegendPress®




MNPT/FNPT




MNPT/Sweat



PEX (F1807)



PEX (F1960)

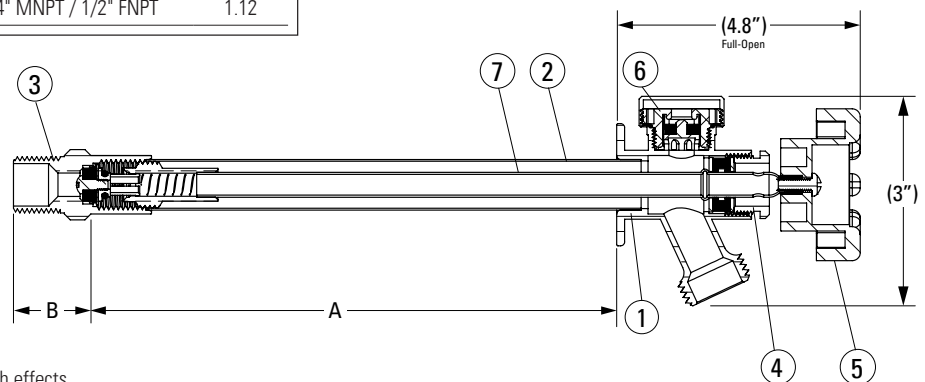

Pictured:
T-552NL
Cut-away view

Certifications/Listings:

Third-Party certified.

NSF / ANSI 61: Drinking water system components health effects.

ASSE 1019-A: Performance requirements for wall hydrant with backflow protection and freeze resistance.

Standards:

ANSI / ASME B1.20.1: Pipe threads, general purpose, inch (MNPT & FNPT).

ANSI / ASME B16.18: Cast pressure alloy-solder-joint pressure fitting (CTS solder).

ASTM F1807: Metal insert fittings utilizing a copper crimp ring or stainless steel clamps.

ASTM F1960: Cold expansion fittings with PEX reinforcing rings.

ANSI / ASME B16.51: Copper and copper alloy press-to-connect pressure fittings.

ANSI / ASME B1.20.7 (male garden hose outlet).

¹This device must not be subjected to more than 12 hours of continuous water pressure. The hose must be removed in order to prevent damage from freezing.