

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

MULTI-TURN ANTI-SIPHON FREEZE-RESISTANT SILLCOCK

TM-550, TM-550P, TMP-550, and TM-550P1960

Easy to grip Softouch™ TPR coated metal handle.

Oversized, 5° angled mounting flange for ease of installation. Includes EPDM rubber gasket.

Integrated anti-siphon vacuum breaker with chrome-plated brass cap.

ASSE 1019-Type A Device.¹



← Extra Wide Flange →

MATERIAL SPECIFICATION


PART	MATERIAL
1 Exterior body	Brass, chrome plated
2 Outer Tube	Lead-free brass, chrome plated
3 End Adapter	Brass, chrome plated
4 Bonnet nut assembly	Brass, chrome plated
5 Handwheel	Aluminum & TPR rubber
6 Vacuum breaker assembly	Forged brass / POM
7 Stem assembly	Lead-free brass / Other

DIMENSIONS - Inch

Size	A
4"	4
6"	6
8"	8
10"	10
12"	12
14"	14

DIMENSIONS - Inch

Inlet Type	B
1/2" MNPT / 1/2" Sweat	1.06
1/2" PEX (F1807)	1.12
1/2" PEX (F1960)	1.25
1/2" Press	1.81
3/4" MNPT / 1/2" FNPT	1.12

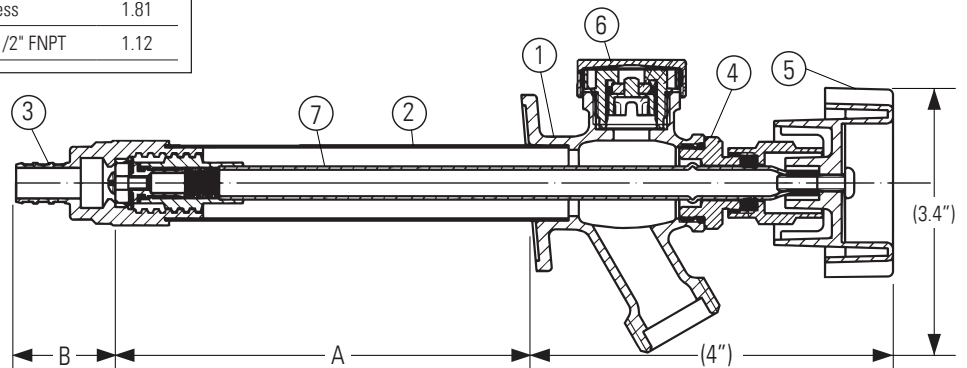

Certifications/Listings:

Third-party certified

ASSE 1019-A: Performance requirements for wall hydrant with backflow protection and freeze resistance

Standards:

ANSI/ASME B1.20.1: Pipe threads, general purpose, Inch

ANSI/ASME B16.18: Cast pressure alloy solder-joint pressure fitting

ASTM F1807: Metal insert fittings utilizing a copper crimp ring or stainless steel clamps.

ASTM F1960: Cold expansion fittings with PEX reinforcing rings.

ANSI/ASME B16.51: Copper and copper alloy press-connect pressure fittings

ANSI / ASME B1.20.7 (male garden hose outlet)

Pictured:
TM-550NL
Cut-away